res enviorem

<u>MECHANICAL</u>								
	T250	T250HD	T250XHD	T250X				
CHARGE CHAMBER VOLUME	2.5	2.5	2.5	2.5				
CHARGE CHAMBER OPENING SIZE	52" x 60"	52" x 60"	52" x 60"	52" x 60"				
RAM FACE SIZE	27" x 60"	27" x 60"	27" x 60"	27" x 60"				
RAM PENETRATION	13"	13"	13"	13"				
COMPACTION FORCE NORMAL	56,500 lbs	76,930 lbs	113,000 lbs	63,585 lbs				
COMPACTION FORCE MAXIMUM	62,172 lbs	88,470 lbs	124,344 lbs	55,260 lbs				
CYCLE TIME	63 seconds	63 seconds	73 seconds	63 seconds				
SYSTEM PRESSURE NORMAL	2,000 psi	2,000 psi	2,000 psi	2,000 psi				
SYSTEM PRESSURE MAXIMUM	2,200 psi	2,200 psi	2,200 psi	2,200 psi				
PUMP CAPACITY	10 gpm	10 gpm	10 gpm	10 gpm				
MOTOR SIZE	10 hp	15 hp	15 hp	10 hp				
CYLINDER SIZE	1 x 6"Ø	1 x 7ӯ	2 x 6"Ø	2 x 4"Ø				
CYLINDER TYPE	Double Acting	Double Acting	Double Acting	Double Acting				
RAM FACE PRESSURE NORMAL	34.2 psi	47.5 psi	69.8 psi	38.5 psi				
RAM FACE PRESSURE MAXIMUM	39.4 psi	52.3 psi	76.8 psi	32.4 psi				
OIL TANK CAPACITY	20 gal	25 gal	75 gal	30 gal				
SHIPPING WEIGHT	4,200 lbs	5,400 lbs	6,400 lbs	4,600 lbs				

ELECTRICAL

CONTROL SYSTEM 110 VOLT 60 CYCLE POWERED BY STEP-DOWN TRANSFORMER

CONTROL PANEL FULLY WIRED. KEYED START BUTTON, EMERGENCY STOP,

FULL LIGHT, RESET BUTTON, PLC, CURRENT SENSOR

POWER 208/230/575 VOLT, 3 PHASE 60 CYCLE

	A	В	С	D	E
T250	141"	45"	68"	52"	60"
T250HD	141"	45"	68"	52"	60"
T250XHD	141"	45"	68"	52"	60"
T250X	117"	45"	68"	52"	60"

STANDARD FEATURES


- ► CSA Approved Design
- ► Heavy Duty Oil tight Pushbutton Controls
- ► Key Lockable Start Pushbutton
- ► Automatic Multi cycle Operation
- ► PLC Controlled System
- ► Full Container Light


OPTIONAL EQUIPMENT

- ► Advance warning Light
- ► Fluid filled Pressure Gauge
- ► Oil Heater
- ► Odor Control System
- ► Open Hopper -(for top or dock loading)
- ► Fully Enclosed Hopper with Door
- ► Through the Wall Installation Kits
- ► Walk-on or Drive-on Decks
- ► Safety Gate
- ► Hydraulic Cart-dump Systems

This Equipment is CSA Approved and Conforms to all Current ANSI Z245.2 Safety Standards.

In order tp provide the most currently engineered and designed equipment, We reserve the right to change specifications without notice. This brochure is intended to provide information only, and should not be used in an arbitrary manner to judge equipment for any particular purpose

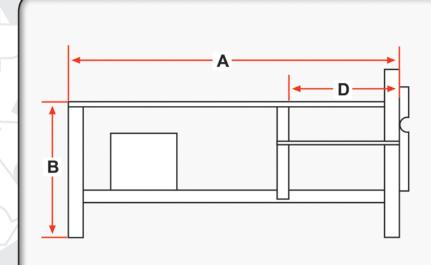



RELCTION
DISTRIBUTING INC.
THE TREND SETTERS

DISTRIBUTED BY:

44 Spiers Crescent, Ajax, Ontario L1S 6Y7 Tel: 905-426-6442 Fax: 905-426-5925 www.balers.ca