

TRI-PAK T-550 SERIES COMPACTORS

MECHANICAL

	T-550	T-550HD	T-550XHD	T-550X
CHARGE CHAMBER VOLUME	5.5	5.5	5.5	5.5
CHARGE CHAMBER OPENING SIZE	96" x 60"	96" x 60"	96" x 60"	96" x 60"
RAM FACE SIZE	36" x 60"	36" x 60"	36" x 60"	36" x 60"
RAM PENETRATION	24"	24"	24"	24"
COMPACTION FORCE NORMAL	56,500 lbs	76,930 lbs	113,000 lbs	78,500 lbs
COMPACTION FORCE MAXIMUM	62,172 lbs	88,470 lbs	124,344 lbs	94,700 lbs
CYCLE TIME	63 seconds	73 seconds	63 seconds	73 seconds
SYSTEM PRESSURE NORMAL	2,000 psi	2,000 psi	2,000 psi	2,000 psi
SYSTEM PRESSURE MAXIMUM	2,200 psi	2,200 psi	2,200 psi	2,200 psi
PUMP CAPACITY	18 gpm	20 gpm	25 gpm	20 gpm
MOTOR SIZE	15 hp	20 hp	25 hp	20 hp
CYLINDER SIZE	1 x 6" dia.	1 x 7" dia.	2 x 6" dia.	2 x 5" dia.
CYLINDER TYPE	Double Acting	Double Acting	Double Acting	Double Acting
RAM FACE PRESSURE NORMAL	26.6 psi	35.6 psi	52.3 psi	36.1 psi
RAM FACE PRESSURE MAXIMUM	28.8 psi	39.2 psi	57.5 psi	40.0 psi
OIL TANK CAPACITY	100 gal	180 gal	220 gal	185 gal
SHIPPING WEIGHT	12,850 lbs	14,120 lbs	15,960 lbs	14,850 lbs

ELECTRICAL

CONTROL SYSTEM	110 VOLT 60 CYCLE POWERED BY STEP-DOWN TRANSFORMER
CONTROL PANEL	FULLY WIRED. KEYED START BUTTON, EMERGENCY STOP, FULL LIGHT, RESET BUTTON, PLC, CURRENT SENSOR
POWER	208/230/575 VOLT, 3 PHASE 60 CYCLE

DIMENSIONS

	A	B	C	D	E
T-550	243"	48"	72"	108"	60"
T-550HD	243"	48"	72"	108"	60"
T-550XHD	243"	48"	72"	108"	60"
T-550X	219"	48"	72"	108"	60"

STANDARD FEATURES



- ▶ CSA Approved Design
- ▶ Heavy Duty Oil - tight Pushbutton Controls
- ▶ Key Lockable Start Pushbutton
- ▶ Automatic Multi - cycle Operation
- ▶ PLC Controlled System
- ▶ Full - Container Light

OPTIONAL EQUIPMENT

- ▶ Advance - warning Light
- ▶ Fluid - filled Pressure Gauge
- ▶ Oil Heater
- ▶ Odor Control System
- ▶ Open Hopper -(for top or dock loading)
- ▶ Fully Enclosed Hopper with Door
- ▶ Through the Wall Installation Kits
- ▶ Walk-on or Drive-on Decks
- ▶ Safety Gate
- ▶ Hydraulic Cart-dump Systems

This Equipment is CSA Approved and
Conforms to all Current ANSI Z245.2
Safety Standards.

In order to provide the most currently engineered and designed
equipment, We reserve the right to change specifications without notice.
This brochure is intended to provide information only, and should not
be used in an arbitrary manner to judge equipment for any particular purpose.

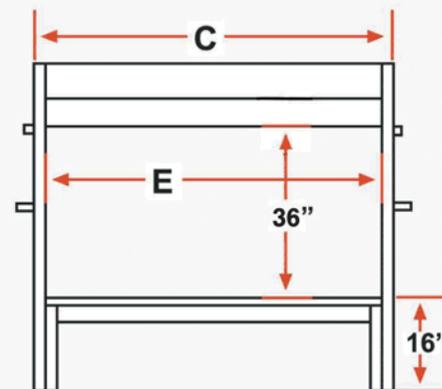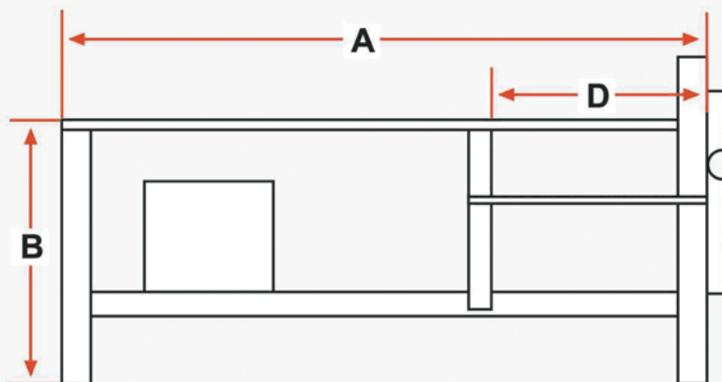

DISTRIBUTING INC.

THE TREND SETTERS

DISTRIBUTED BY: