

TRI-PAK TB7230 SERIES BALERS

MECHANICAL

	7230	7230HD	7242
BALE SIZE	72"x42"x30"	72"x42"x30"	72"x42"x42"
BALE WEIGHT	+1200 lbs	+1200 lbs	+1500 lbs
CYLINDER SIZE	2 x 5"Ø	2 x 5"Ø	2 x 5"Ø
FULL PENETRATION CYL.	NO	NO	NO
BALING FORCE NORMAL	78,500 lbs	78,500 lbs	78,500 lbs
BALING FORCE MAXIMUM	86,350 lbs	86,350 lbs	86,350 lbs
SYSTEM PRESSURE NORMAL	2,000 psi	2,000 psi	2,000 psi
SYSTEM PRESSURE MAXIMUM	2,200 psi	2,200 psi	2,200 psi
CYCLE TIME	45 seconds	40 seconds	40 seconds
PUMP CAPACITY	15 gpm	20 gpm	20 gpm
MOTOR SIZE	15 hp	20 hp	20 hp
PLATEN PRESSURE NORMAL	36.0 psi	36.0 psi	26.0 psi
PLATEN PRESSURE MAXIMUM	43.0 psi	43.0 psi	31.0 psi
OIL TANK CAPACITY	25 gal	25 gal	25 gal
BALE EJECTION	Dual Chain	Dual Chain	Dual Chain
SHIPPING WEIGHT	5200 lbs	5200 lbs	6025 lbs

ELECTRICAL

CONTROL SYSTEM	110 VOLT 60 CYCLE POWERED BY STEP-DOWN TRANSFORMER
CONTROL PANEL	FULLY WIRED. KEYED START BUTTON, EMERGENCY STOP, FULL LIGHTS, RESET BUTTON
POWER	208/230/575 VOLT, 3 PHASE 60 CYCLE

DIMENSIONS

	A	B	C	D	E
7230	90"	100"	42"	48"	23"
7230HD	90"	100"	42"	48"	23"
7242	90"	100"	54"	48"	23"

STANDARD FEATURES


- ▶ CSA Approved Design
- ▶ Heavy Duty Oil - tight Pushbutton Controls
- ▶ Key Lockable Start Pushbutton
- ▶ Automatic Single - cycle Operation
- ▶ PLC Controlled System
- ▶ Full - Container Light

OPTIONAL EQUIPMENT

- ▶ Deep Chamber (42")
- ▶ Full Bale Light
- ▶ Hydraulic Bale Dump
- ▶ R.H. Hinged Bale Door
- ▶ Barn Style Feed Doors
- ▶ Rear Wire Guides

This Equipment is CSA Approved and
Conforms to all Current ANSI Z245.2
Safety Standards.

In order to provide the most currently engineered and designed
equipment, We reserve the right to change specifications without notice.
This brochure is intended to provide information only, and should not
be used in an arbitrary manner to judge equipment for any particular purpose.

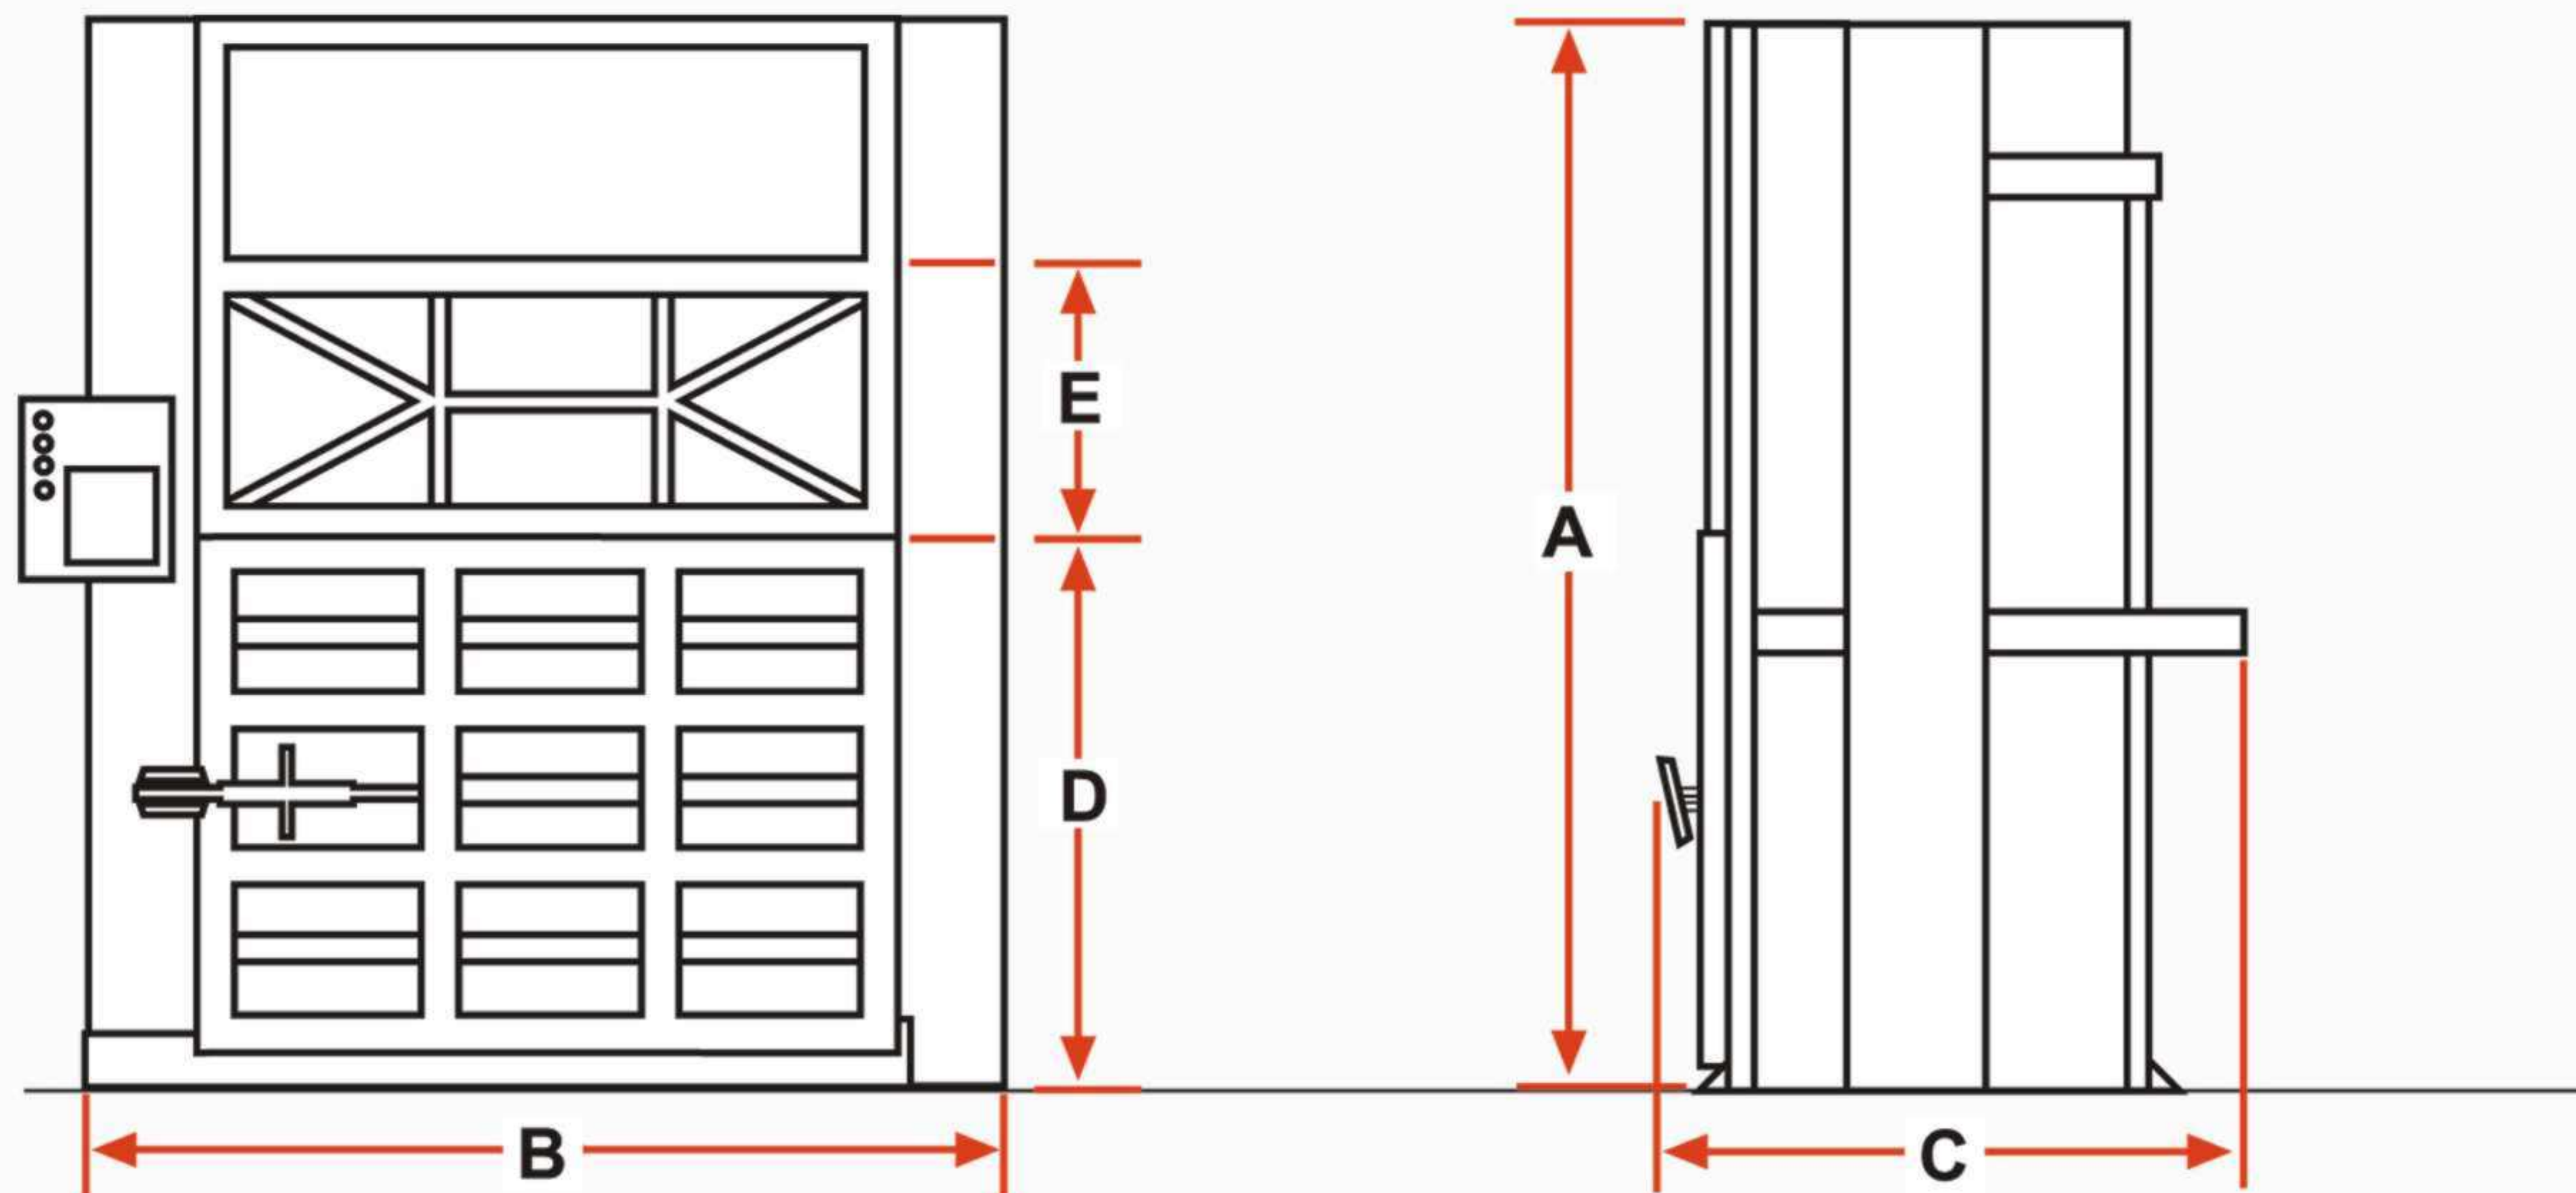

DISTRIBUTED BY:

REACTION

DISTRIBUTING INC.

THE TREND SETTERS

44 Spiers Crescent, Ajax, Ontario L1S 6Y7 Tel: 905-426-6442 Fax: 905-426-5925 www.balers.ca